

PCB LAYOUT



Rating: 50mA, 24VDC
 额定值: 50mA, 24VDC
 Contact Resistance: 50mΩ max.
 接触电阻: 最大50mΩ.
 Insulation Resistance: 10MΩ min. 100VDC
 绝缘电阻: 10MΩ最小100VDC
 Dielectric Strength: 250VAC/1 min.
 介电强度: 250VAC/1分钟。

Operating Temperature: -40°C to +160°C
 工作温度: -40°C至+160°C
 Electrical Life: 1,000,000 cycles
 电气寿命: 1000000次循环
 Operating force: 300 ± 50gf
 操作力: 300±50GF
 Stroke: 1.00 ± 0.2mm
 行程: 1.00±0.2mm
 Waterproof grade: IP67
 防水等级: IP67

TP1604230 □ □

Height

Height	
64	6.4MM
87	8.7MM
104	10.4MM

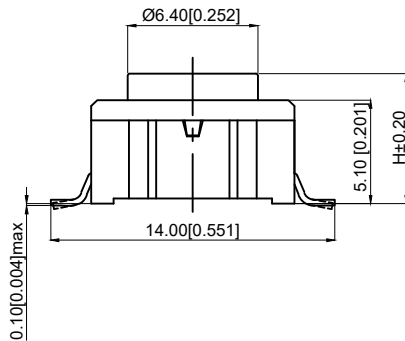

6	Terminal 端子	Copper alloy 合金铜	4	
5	Reed 簧片	Stainless steel 不锈钢	1	silver plating 镀银
4	Silicone button 硅胶按钮	silica gel 硅胶	1	
3	Upper cover 上盖	Nylon 尼龙	1	Black 黑色
2	Button 按钮	Nylon 尼龙	1	Black 黑色
1	Base 底座	Nylon 尼龙	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME: TP1604230 □ □
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
ROCPCU TECHNOLOGY CO., LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				