



Single color electrical schematic diagram
单色电气原理图

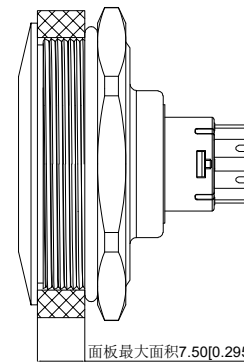

Installation View
安装视图

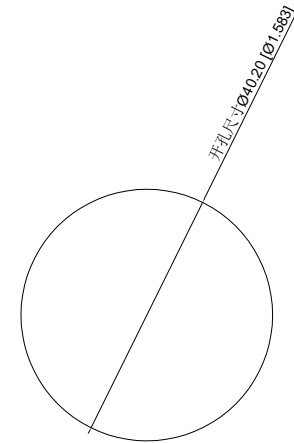

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO: TP94012G□□□□
DATE	2019	APPROVAL	B ALEN	Https: www.rocpu.tw

ROCPU TECHNOLOGY CO.,LTD

Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission

Operation method

- 1: Self-locking
- 2: Self-compound

TP94012G □ □ □ □

LED voltage

- 3: 3V
- 6: 6V
- 12: 12V
- 24: 24V
- 36: 36V
- 48: 48V
- 60: 60V
- 110: 110V
- 220: 220V

Material

- A: Aluminum alloy
- S: Stainless steel
- B: Brass

LED Color



- R: Red
- Y: Yellow
- G: Green
- B: Blue
- W: White
- O: Orange

连接形式

1. Welding temperature of wire: $320 \pm 20 \text{ }^\circ\text{C}$
 线材焊接温度: $320 \pm 20 \text{ }^\circ\text{C}$
 Wire welding duration: less than 3 seconds
 线材焊接时长: 时长3秒以下
2. Can be used with dedicated connectors:
 可配专用接插件使用:
 - 2.1 Switch function wire: Green Line (C) Blue Line (NO) Yellow Line (NC)
 开关功能线材: 绿线 (C) 蓝线 (NO) 黄线 (NC)
 - 2.2 LED functional wire: red wire positive pole black wire negative pole
 LED功能线材: 红线正极 黑线负极
 - 2.3 LED is an electrodeless lamp bead that can be lit without the need to separate positive and negative poles
 LED为无极灯珠, 无需分正负极也可点亮



性能参数

1. Heating current: U_i : AC250V, I_{th} : 5A
 发热电流: U_i : AC250V, I_{th} : 5A
2. Rated current: 3A/DC36V
 额定电流: 3A/DC36V
3. Power-frequency withstand voltage: 2000V/1min
 工频耐压: 2000V/1min
4. Insulation resistance: $\geq 1000\text{M}\Omega$
 绝缘电阻: $\geq 1000\text{M}\Omega$
5. Contact resistance: $\leq 50\text{m}\Omega$
 接触电阻: $\leq 50\text{m}\Omega$
6. Pressing stroke: $2.50\text{mm} \pm 0.10$
 按压行程: $2.50\text{mm} \pm 0.10$
7. Contact stroke: $1.50\text{mm} \pm 0.10$
 接触行程: $1.50\text{mm} \pm 0.10$
8. welding temperature: $320 \text{ }^\circ\text{C} \pm 20 \text{ }^\circ\text{C}$
 焊接温度: $320 \text{ }^\circ\text{C} \pm 20 \text{ }^\circ\text{C}$
9. Welding duration: Less than 3 seconds in duration
 焊接时长: Less than 3 seconds in duration
10. Nut assembly torque: 5-14N.m
 螺帽装配力矩: 5-14N.m
11. Protection level: IP67
 防护等级: IP67
12. Explosion prevention level: IK10
 防暴等级: IK10
13. Working environment temperature: $-20 \text{ }^\circ\text{C} \sim +55 \text{ }^\circ\text{C}$
 工作环境温度: $-20 \text{ }^\circ\text{C} \sim +55 \text{ }^\circ\text{C}$
14. Compression torque: $\leq 2.5\text{N}$
 按压扭力: $\leq 2.5\text{N}$
15. Electrical life: 50,000 cycles
 电气寿命: 50,000 cycles
16. Mechanical: 500,000 cycles
 机械寿命: 500,000 cycles
17. LED lamp power consumption: 20mA以下
 LED灯功耗: 20mA以下
18. LED lamp lifespan: 40000h
 LED寿命: 40000h
19. NO reverse thrust foot torque: $\leq 30\text{N}$
 NO反推脚扭力: $\leq 30\text{N}$

A4					COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3					X.XX	± 0.10	DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO: TP94012G □ □ □ □
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw
A1					X	± 0.25	ROCPU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR					

材质参数

9	luminous zone 发光区	PC 塑胶	1	
8	LEDpin LED引脚	Brass 黄铜	1	Silvering 镀银
7	Base 底座	PA46	1	
6	NOPin NO引脚	Brass 黄铜	1	gold-plating 镀金
5	Contact material 接触材质	silver alloy 银合金	1	Silvering 镀银
4	Arm nut 固定螺帽	Brass 黄铜	1	nickeling 镀镍
3	Oring O型圈	Silica gel 硅胶	1	
2	Housing 外壳	SUS/Aluminum alloy/Brass 不锈钢/铝合金/黄铜	1	
1	Key 按键	SUS/Aluminum alloy/Brass 不锈钢/铝合金/黄铜	1	
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				 <p>台普 ROCPU</p>	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3					X.XX	± 0.10	DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:TP94012G□□□□
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw
A1					X	± 0.25	ROCPU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR	—	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission			