



PCB LAND DIMENSION



CIRCUIT DIAGRAM

- 1. Rating: DC 12V 50mA
- 1. 额定值: DC 12V 50mA
- 2. Contact Resistance: 100mΩ MAX
- 2. 接触电阻: 最大100mΩ
- 3. Insulation resistance: ≥ 100M Ω
- 3. 绝缘电阻: ≥100MΩ

- 4. Stroke: 0.35 ± 0.10mm
- 4. 行程: 0.35±0.10mm
- 5. Service life: 100000 times
- 5. 使用寿命: 100000 次
- 6. Operating temperature: - 20 °C ~ + 70 °C
- 6. 使用温度: -20 °C ~ + 70 °C

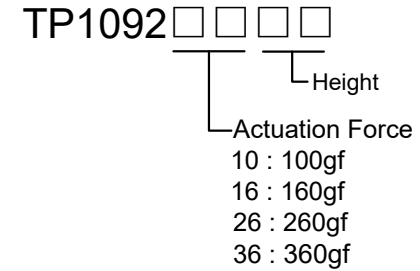

NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注
5	Terminal 端子	Brass 黄铜	4	Ag plating 镀银
4	Base 底座	PA6T	1	Black 黑色
3	Contact 弹片	SUS	1	Ag plating 镀银
2	Stem 按钮	PA6T	1	Black 黑色
1	Cover 盖板	Brass 黄铜	1	Sn plating 镀锡

REV	DATE	REVISION	DESCRIPTION	ISSUE
A4				
A3				
A2				
A1				



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED	PRODUCT NAME: TP1092 □□□□
DRAWN BY	SHUHAO	CHECKED BY	COCO
DATE	2019	APPROVAL	B ALEN
MODEL NO:		Https: www.rocpcu.tw	
<b>ROCPCU TECHNOLOGY CO., LTD</b>			
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission			