


Technical parameter
技术参数



- Rated current: 100mA 30V DC
- Contact resistance: ≤ 200m Ω
- 接触电阻: ≤200m Ω
- 操作力: 260gf±50gf

- Maximum stroke: 2.0 ± 0.2mm
- 最大行程: 2.0±0.2mm
- Operating temperature: -40℃~ + 80℃
- 工作温度: -40℃~ + 80℃
- Insulation resistance: ≥ 100M Ω
- 绝缘电阻: ≥100MΩ
- Electric strength: AC250v 50Hz 1Min
- 抗电强度: AC250v 50Hz 1Min
- Service life: 10000 times
- 寿命: 10000次

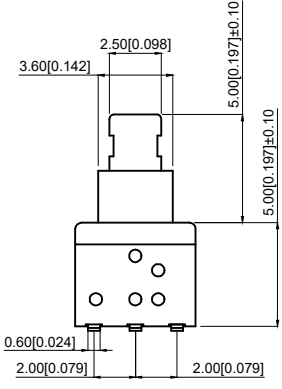


BTSA-□-S-5

Operation
L : self-locking
N : lock-free



Circuit diagram
Normal: 1-2 on 4-5 on
Press: 2-3 on 5-6 on



7	crochet hook 钩针	SUS 不锈钢丝	1	Natural color 本色
6	Spring 弹簧	SUS 不锈钢丝	1	Natural color 本色
5	reed 簧片	Composite silver 复合银	1	Natural color 本色
4	Upper cover 上盖	PPA	1	black 黑色
3	handle 按柄	PA6T	1	Beige 米黄色
2	terminal 端子	Brass 黄铜	1	Natural color/silver 本色/镀银
1	Pedestal 基座	PPA	1	pale 灰白
ITEM	Name	Materials	NUM	COLOR

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED	PRODUCT NAME: BTSA-□-S-5
DRAWN BY	SHUHAO	CHECKED BY	COCO
DATE	2019	APPROVAL B	ALEN
ROCPCU TECHNOLOGY CO.,LTD			
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission			

MODEL NO:

Https: www.rocpcu.tw