


向视图





印制线路板

Technical parameter

技术参数

1. Rated current: 100mA 30V DC
2. Contact resistance:  $\leq 200m\Omega$
3. Operating force:  $260gf \pm 50gf$
4. Maximum stroke:  $2.3 \pm 0.2mm$
5. Insulation resistance:  $\geq 100m\Omega$
6. Service life: 10000 times



4. Maximum stroke:  $2.3 \pm 0.2mm$
5. Insulation resistance:  $\geq 100m\Omega$
6. Service life: 10000 times

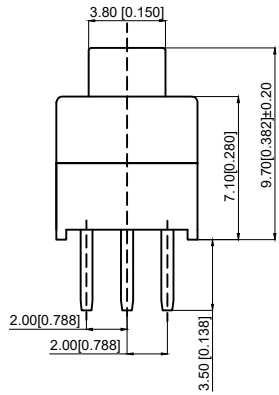

Normal: 2-3 on, 4-5 on  
 常态: 2-3导通 4-5导通  
 Press: 1-2 on, 5-6 on  
 按下: 1-2导通 5-6导通

BTSA-□-P-12

Operation  
 L : self-locking  
 N : lock-free



ITEM	Name	Materials	NUM	COLOR
7	crochet hook 钩针	SUS 不锈钢丝	1	Natural color 本色
6	Spring 弹簧	SUS 不锈钢丝	1	Natural color 本色
5	reed 簧片	Composite silver 复合银	1	Natural color 本色
4	Upper cover 上盖	PPA	1	black 黑色
3	handle 按柄	PPA	1	black 黑色
2	terminal 端子	Brass 黄铜	1	Natural color/silver 本色/镀银
1	Pedestal 底座	PPA	1	black 黑色

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	$\pm 0.10$
X.X	$\pm 0.15$
X	$\pm 0.25$
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME: BTSA-□-P-12
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
<b>ROCPCU TECHNOLOGY CO.,LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				