




PCB LAYOUT  
BOTTOM VIEW

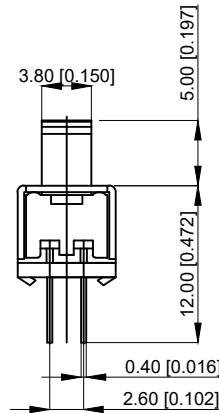

SCHEMATIC

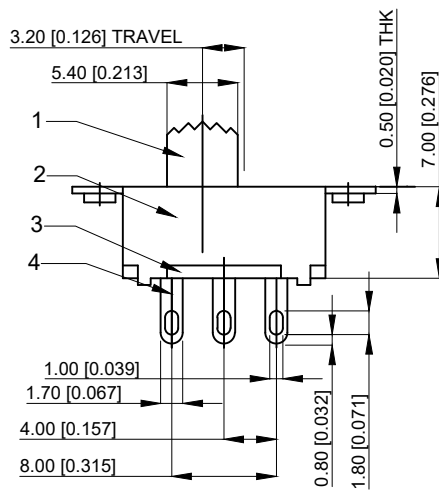

- 1.RATING:0.5A 50V DC
- 1.额定值: 0.5A 50V DC
- 2.FUNCTION:2P2T
- 2.接触型式: 2P2T
- 3.CONTACT RESISTANCE:100m Ω MAX
- 3.接触电阻: 100m Ω MAX
- 4.INSULATION RESISTANCE:100M Ω MIN
- 4.绝缘电阻: 100M Ω MIN

- 5.OPERATING FORCE:250gf±100gf
- 5.动作力: 250gf±100gf
- 6.LIFE TEST:10000 times
- 6.寿命: 10000 times
- 7.Service temperature: -16℃~ + 60℃
- 7.使用温度: -16℃~ + 60℃

6	SPRING 弹簧	STEEL WIRE 钢丝	2	
5	CONTACT 触点	BRASS 黄铜	2	Ag PLATED 镀银的
4	TERMINAL 终端	BRASS 黄铜	6	Ag PLATED 镀银的
3	BASE 基座	PHENOLIC RESIN 酚醛树脂	1	
2	FRAME 框架	BRASS 黄铜	1	Ni PLATED 镀镍
1	KNOB 按钮	POM	1	BLACK 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25

ANGULAR

UNIT	MM	PROJECTED	
DRAWN BY	FUYUAN	CHECKED BY	COCO
DATE	2019	APPROVAL B	ALEN

PRODUCT NAME:

MODEL NO: TP60111125

Https: www.rocpu.tw

**ROCPCU TECHNOLOGY CO.,LTD**

Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission