


PCB.Welding diagram
PCB.焊接图



Circuit diagram
电路图

SPECIFICATION

规格

- 1.Rating: DC12V 50mA MAX
- 1.额定值: DC12V 50mA MAX
- 2.Contact resistance:100mΩ MAX
- 2.接触电阻: 100mΩ MAX
- 3.Insulation resistance:100MΩ Min,100V DC
- 3.绝缘电阻: 100MΩMin,100V DC


4.Dielectric strength:250VAC

- 4.介电强度: 250VAC
- 5.Operating temperature range:-25℃ to + 80℃
- 5.工作温度范围: -25℃至 + 80℃
- 6.Operating force:260±80gf
- 6.操作力: 260±80gf
- 7.Operating life:100,000 cycles
- 7.使用寿命: 100000次循环
- 8.Travel: 0.25±0.1mm
- 8.行程: 0.25±0.1mm

TPB01-107L□S-RF

LED COLOR

LED COLOR	
1	Red
2	Yellow
3	Green
4	Blue
5	White

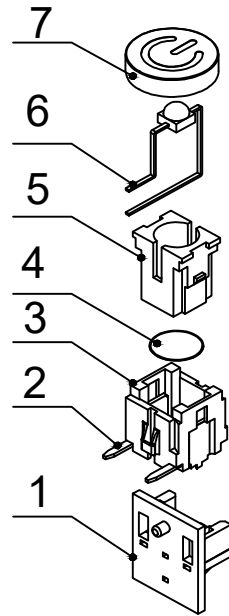

NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注
7	Button cap 按键帽	ABS	1	
6	LED		1	
5	Base 基座	PA66	1	White 白色
4	Shrapnel 弹片	SUS	1	
3	Base 底座	PA66	1	Black 黑色
2	Terminal 端子	Bronze	1	
1	Bracket 支架	PPA	1	Black 黑色

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED	PRODUCT NAME:TPB01-107L□S-RF
DRAWN BY	SHUHAO	CHECKED BY	COCO
DATE	2019	APPROVAL B	ALEN
MODEL NO:		Https: www.rocpcu.tw	
ROCPCU TECHNOLOGY CO.,LTD			
Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission			