
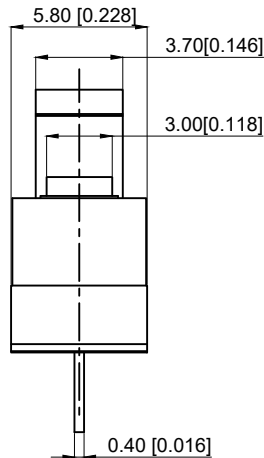


NOTES:

1. Rating: 3A 125VAC
1. 额定值: 3A 125VAC
2. Dielectric Strength: AC500 1min
2. 耐电压: AC500 1min
3. Contact Resistance: ≤100mΩ Max
3. 接触电阻: ≤100mΩ
4. Insulation Resistance: ≥100MΩ
4. 绝缘电阻: ≥100MΩ
5. Operating Force: 30±15gf
5. 操作力: 30±15gf
6. Electric Life: 100,000 times
6. 电气寿命: 100,000 times
7. Mechanical Life: 1,000,000 times
7. 机械寿命: 1,000,000 times
8. Operating Temperature: -25 to +85°C
8. 使用温度: -25 to +85°C

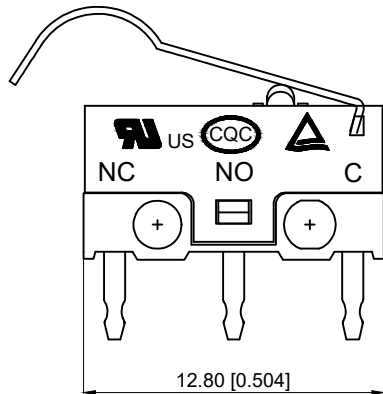

7	Press 压柄	SUS	1	
6	Terminal 端子	Barss	1	Ag plating 镀银
5	Contact 触点	silver alloy 银合金	1	
4	Button 按钮	PBT	1	
3	Shrapnel 弹片	Beryllium Copper 铍铜	1	
2	Cover plate 盖片	PBT	1	
1	Pedestal 基座	PBT	1	
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP301311400
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
<b>ROCPCU TECHNOLOGY CO., LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				