





PCB.焊接图

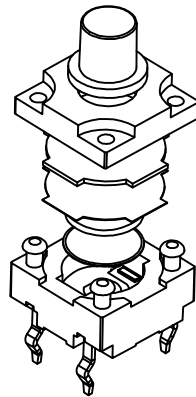

电路图



NOTES:

- 1. Rating: 12VDC 50mA
- 2. Dielectric Strength: 250V AC
- 3. Contact Resistance: ≤50mΩ Max
- 4. Insulation Resistance: ≥100MΩ
- 5. Life: 100,000 times
- 6. Trip: 0.35±0.1mm
- 7. Waterproof grade: IP67

TP1381 □ □ □ □

Height  
Actuation Force  
16 : 160gf  
26 : 260gf

Height	
65	6.5MM
70	7.0MM
75	7.5MM
80	8.0MM
85	8.5MM
90	9.0MM
95	9.5MM
100	10.0MM
105	10.5MM
110	11.0MM
115	11.5MM
120	12.0MM

8	Contact 触点	Brass	1	Ag plating 镀银
7	Pedestal 基座	PPA	1	Black 黑色
6	Reed 簧片	SUS	1	Covered with silver 覆银
5	Inner button 内按钮	PPA	1	Black 黑色
4	Waterproofing membrane 防水膜	PI	1	Yellow 黄色
3	gcl 防水垫	Silica gel	1	Black 黑色
2	cover plate 盖板	PPA	1	Black 黑色
1	Button 按钮	PPA	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	

UNIT	MM	PROJECTED		PRODUCT NAME: TP1381 □ □ □ □
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
<b>ROCPCU TECHNOLOGY CO.,LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				