


**NOTES:**

- 1. Rating: 12VDC 50mA
- 1. 额定值: 12VDC 50mA
- 2. Dielectric Strength: 100V AC
- 2. 耐电压: 100V AC
- 3. Contact Resistance: ≤100mΩ Max
- 3. 接触电阻: ≤100mΩ

- 4. Insulation Resistance: ≥100MΩ
- 4. 绝缘电阻: ≥100MΩ
- 5. Operating Force: 200±50gf
- 5. 操作力: 260±50gf
- 6. Life: 10,000 times
- 6. 寿命: 10,000 times
- 7. Operating Temperature: -10°C to +60°C
- 7. 使用温度: -10 to +60°C

| Height |       |
|--------|-------|
| 20     | 2.0MM |
| 30     | 3.0MM |
| 40     | 4.0MM |

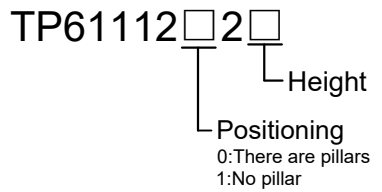

| 5     | Terminal 端子   | Brass             | 1      | Ag plating 镀银 |
|-------|---------------|-------------------|--------|---------------|
| 4     | 外壳            | SUS               | 1      |               |
| 3     | 簧片            | Silver copper 复银铜 | 2      | Ag plating 镀银 |
| 2     | 按柄            | PA46              | 1      | Black 黑色      |
| 1     | Pedestal 基座   | PPA               | 1      | Black 黑色      |
| NO 序号 | Part name 部件名 | Material 材料       | QTY 数量 | Remark 备注     |

| A4  |      |          |             |       |
|-----|------|----------|-------------|-------|
| A3  |      |          |             |       |
| A2  |      |          |             |       |
| A1  |      |          |             |       |
| REV | DATE | REVISION | DESCRIPTION | ISSUE |



| COMMON TOLERANCE |        |
|------------------|--------|
| X.XX             | ± 0.10 |
| X.X              | ± 0.15 |
| X                | ± 0.25 |
| ANGULAR          | —      |

| UNIT     | MM     | PROJECTED  |      |
|----------|--------|------------|------|
| DRAWN BY | SHUHAO | CHECKED BY | COCO |
| DATE     | 2019   | APPROVAL B | ALEN |

|  |  |
|--|--|
| PRODUCT NAME: TP61112□2□   |  |
| MODEL NO:  |  |
| Https: www.rocpcu.tw   |  |
| <b>ROCPCU TECHNOLOGY CO.,LTD</b>   |  |
| <small>Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission</small> |  |