

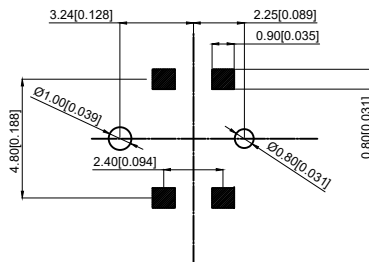
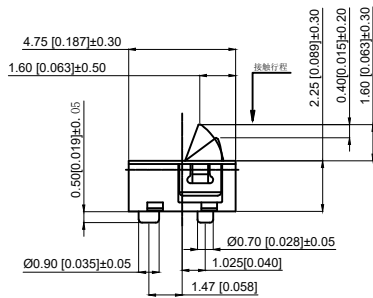



NOTES:

1. Rated voltage: 50mA DC12V
1. 额定电压: 50mA DC12V
2. insulation resistance: ≥100mΩ
2. 绝缘电阻: ≥100mΩ
3. contact resistance: ≤300mΩ
3. 接触电阻: ≤300mΩ
4. Withstand voltage: AC100V(50/60Hz)
4. 耐电强度: AC100V(50/60Hz)
5. life: 50000 cycles
5. 寿命: 50000次
6. Operating temperature: -10°C~60°C
6. 操作温度: -10°C~60°C
7. Operating force: 50±20gf
7. 操作力度: 50±20gf



5	lid 盖子	SUS	1	silvery white 银白色
4	Contact spring 接触弹簧	Phosphor bronze	1	silvery white 银白色
3	Card 卡件	Phosphor bronze	1	silver plating 镀银
2	lampstand 底座	LCP	1	Black 黑色
1	key 按键	PA46	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注



A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP71421
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
ROCPCU TECHNOLOGY CO.,LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				