


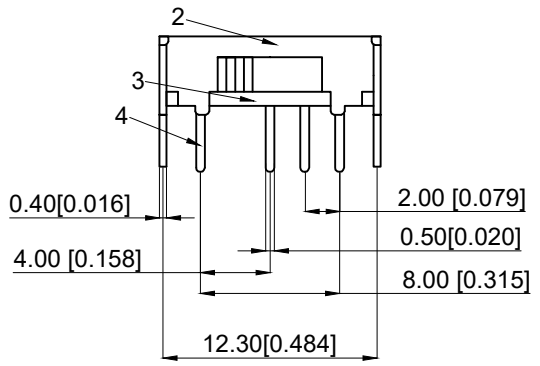


- 1.Limit value: 0.3A 50V DC
- 1.额定值: 0.3A 50V DC
- 2.Contact resistance: $\leq 100m\Omega$ Max
- 2.接触电阻: $\leq 100m\Omega$ MAX
- 3.Insulation resistance: $\geq 100m\Omega$ Max
- 3.绝缘电阻: $\geq 100m\Omega$ MAX
- 4.Withstand voltage: AC 500V 1 min
- 4.耐电压: AC 500V 1 min
- 5.Action force: $260 \pm 100gf$
- 5.动作力: $260 \pm 100gf$
- 6.Stroke: 2.0mm
- 6.行程: 2.0mm
- 7.Service life: 10000 times
- 7.使用寿命: 10000次
- 8.Service temperature: $-16^{\circ}C \sim +60^{\circ}C$
- 8.使用温度: $-16^{\circ}C \sim +60^{\circ}C$
- 9.Contact type: 1P3T
- 9.接触型式: 1P3T

Height	
3	3.0MM
4	4.0MM
5	4.0MM
6	6.0MM

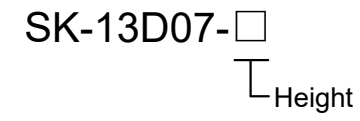

SCHMATIC

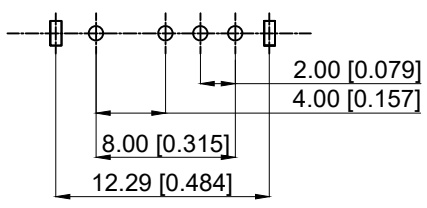

PCB LAYOUT

4	Terminal 端子	Brass 黄铜	4	Ag plated 镀银
3	Base 基座	Phenolic Resin 酚醛树脂	1	
2	Frame 框架	SUS	1	Natural
1	Hand shank 手柄	PA66	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME: SK-13D07□
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
ROCPCU TECHNOLOGY CO.,LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				