

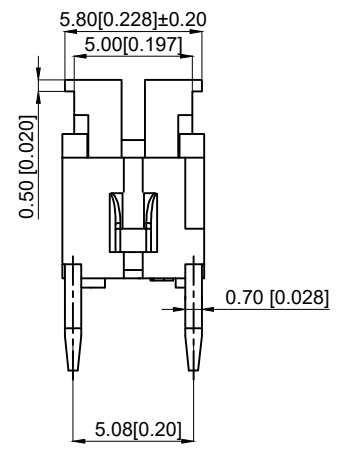
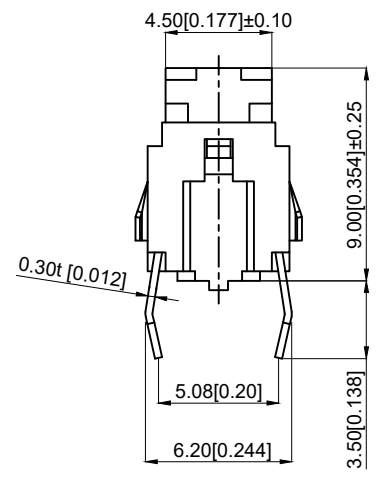


- NOTES:
1. Rating: 12VDC 50mA
1. 额定值: 12VDC 50mA
 2. Dielectric Strength: 250V AC
2. 耐电压: 250V AC
 3. Contact Resistance: ≤100mΩ Max
3. 接触电阻: ≤100mΩ
 4. Insulation Resistance: ≥100MΩ
4. 绝缘电阻: ≥100MΩ
 5. Operating Force: 260±50gf
5. 操作力: 260±50gf
 6. Life: 100,000 times
6. 寿命: 100,000 times
 7. Travel: 0.25±0.1mm
7. 行程: 0.25 + 0.1mm
 8. Operating Temperature: -20 to +70°C
8. 使用温度: -20 to +70°C




| | | | | |
|----------|------------------|----------------|-----------|------------------|
| 5 | | | | |
| 4 | Button 按钮 | PA66 | 1 | |
| 3 | Shrapnel 弹片 | SUS | 1 | |
| 2 | Pedestal 基座 | PA66 | 1 | |
| 1 | Terminal 端子 | Brass | 4 | Ag plating 镀银 |
| NO 序号 | Part name 部件名 | Material 材料 | QTY 数量 | Remark 备注 |

CIRCUIT



PCB LAYOUT

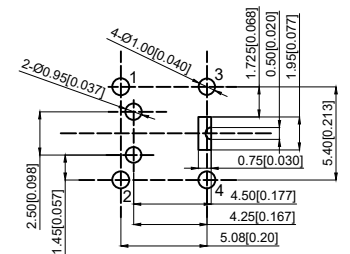

| | | | | |
|-----|------|----------|-------------|-------|
| A4 | | | | |
| A3 | | | | |
| A2 | | | | |
| A1 | | | | |
| REV | DATE | REVISION | DESCRIPTION | ISSUE |



| | |
|------------------|--------|
| COMMON TOLERANCE | |
| X.XX | ± 0.10 |
| X.X | ± 0.15 |
| X | ± 0.25 |
| ANGULAR | — |

| | | | | |
|---|--------|------------|------|----------------------|
| UNIT | MM | PROJECTED | | PRODUCT NAME: |
| DRAWN BY | FUYUAN | CHECKED BY | COCO | MODEL NO: TPC01-100N |
| DATE | 2019 | APPROVAL B | ALEN | Https: www.rocpcu.tw |
| ROCPCU TECHNOLOGY CO., LTD | | | | |
| Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission | | | | |