






向视图



PCB LAYOUT TOP VIEW
PCB布局俯视图

Technical parameter
技术参数

1. Rated current: 100mA 30V DC
1.额定电流: 100mA 30V DC
2. Contact resistance: ≤ 200mΩ
2.接触电阻: ≤200mΩ
3. Operating force: 260 ± 50gf
3.操作力: 260±50gf
4. Maximum stroke: 2.0 ± 0.2mm
4.最大行程: 2.0±0.2mm
5. Insulation resistance: ≥ 100MΩ
5.绝缘电阻: ≥100MΩ
6. Service life: 10000 times
6.寿命: 10000次

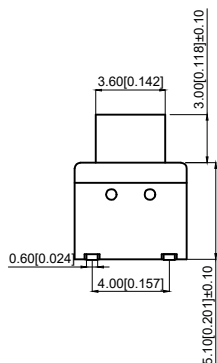

电路简图
常态: 1与2导通, 3与4导通
按下: 全断开

行程与通电状态对照

行程状态 (mm)	通电状态
0-0.6	 1与2通 3-4通
0.6-2.0	 全断开

常闭型

6	Spring 弹簧	SUS		
5	Contact reed 接触簧片	Composite silver 复合银	1	
4	Cover 盖板	PPA	1	Black 黑色
3	Stem 按钮	PA6T	1	white 白色
2	Terminal 端子	Brass 黄铜	1	
1	Base 基座	PPA	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				<p>台普 ROCPCU</p>	COMMON TOLERANCE	UNIT	MM	PROJECTED		PRODUCT NAME:	
A3						X.XX	± 0.10	DRAWN BY	FUYUAN	CHECKED BY	COCO
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw
A1					X	± 0.25	<p>ROCPCU TECHNOLOGY CO.,LTD</p> <p>Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission</p>				
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR					
	A		B		C	D	E	F	G		