



PCB LAYOUT BOTTOM VIEW
PCB布局底视图


1. Specification:
- 1. 规范:
 - 2. Rating: 1.0A/DC24V
 - 3. 额定值: 1.0A/DC24V
 - 4. Contact resistance: ≤50mΩ
 - 5. 接触电阻: ≤50mΩ
 - 6. Insulation Resistance: ≥100MΩ DC250V
 - 7. 绝缘电阻: ≥100MΩ DC250V
 - 8. Compressive strength: AC250V 1minute
 - 9. 抗压强度: AC250V 1分钟
 - 6. Operating temperature: -25°C to +70°C
 - 7. 工作温度: -25°C至+70°C
 - 7. Storage humidity: <85%RH
 - 8. 储存湿度: <85%RH
 - 8. Electrical life: 10,000Cycles
 - 9. 电气寿命: 10000次
 - 9. Operating Force: 260±80gf
 - 9. 操作力: 260±80gf

Height	
4	4.0MM
5	4.0MM
6	6.0MM

SK-22F14-□
Height

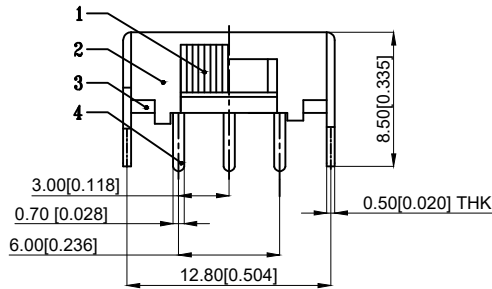

6	Contact strip 接触片	BRASS 黄铜	2	Ag PLATED 镀银
5	SPRING 弹簧	SUS 不锈钢	2	
4	TERMINAL 终端	BRASS 黄铜	6	Ag PLATED 镀银
3	BASE 基座	PHENOLIC RESIN 酚醛树脂	1	
2	FRAME 框架	Iron 铁	1	Ni PLATED 镀镍
1	KNOB 手柄	PA66	1	BLACK 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

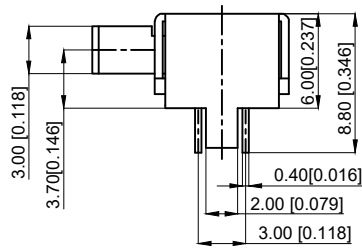

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME: SK-22F14□
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
ROCPCU TECHNOLOGY CO.,LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				