

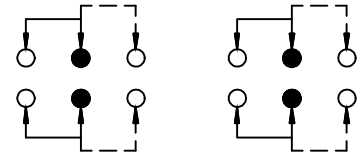


PCB LAYOUT BOTTOM VIEW

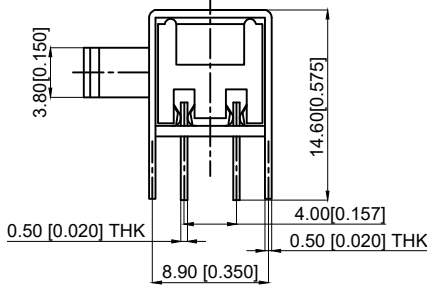

SCHEMATIC(SHORTING)

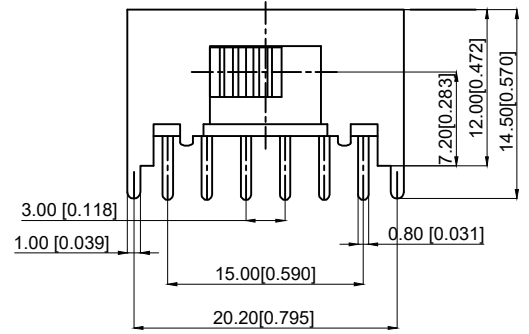

1. Specification:
- 1. 规范:
  - 2. Rating: 1.0A/DC24V
  - 2. 额定值: 1.0A/DC24V
  - 3. Contact resistance: ≤50mΩ
  - 3. 接触电阻: ≤50mΩ
  - 4. Insulation Resistance: ≥100MΩ DC250V
  - 4. 绝缘电阻: ≥100MΩDC250V
  - 5. Compressive strength: AC250V 1minute
  - 5. 抗压强度: AC250V 1分钟
  - 6. Operating temperature: -25°C to +70°C
  - 6. 工作温度: -25°C至+70°C
  - 7. Storage humidity: <85%RH
  - 7. 储存湿度: <85%RH
  - 8. Electrical life: 10,000Cycles
  - 8. 电气寿命: 10000次
  - 9. Operating Force: 260±80gf
  - 9. 操作力: 260±80gf

Height	
4	4.0MM
5	5.0MM
6	6.0MM

TP6042112 □  
 └─ Height

7	STEEL BALL 钢珠	STEEL	1	NATURAL
6	SPRING PLATE 簧片	STEEL WIRE	1	TEMPER
5	CONTACT CLIP 接触片	PBS STRIP	4	Ag CLAD
4	TERMINAL 端子	BRASS	12	Ag PLATED
3	BASE 基座	PHENOLIC RESIN	1	NATURAL
2	FRAME 框架	STEEL	1	Ni PLATED
1	KBOB 手柄	PA66	1	BLACK
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME: TP6032112 □
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
<b>ROCPCU TECHNOLOGY CO.,LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				