

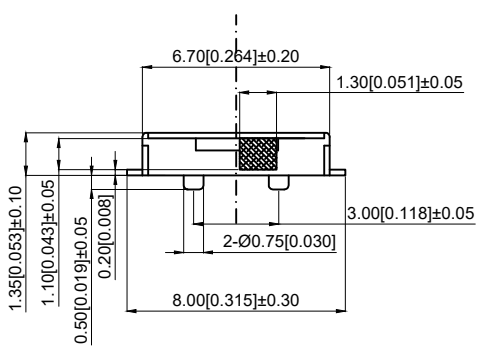


NOTES:  
 1.Rating:12VDC 50mA  
 1.额定值: 12VDC 50mA  
 2.Dielectric Strength:250V AC  
 2.耐电压: 250V AC  
 3.Contact Resistance:≤100mΩ Max  
 3.接触电阻: ≤100mΩ  
 4.Insulation Resistance:≥100MΩ  
 4.绝缘电阻: ≥100MΩ  
 5.Operating Force:180±50gf  
 5.操作力: 180±50gf  
 6.Life: 10,000 times  
 6.寿命: 10,000 times  
 7.Travel: 1.50±0.3mm  
 7.行程: 1.50 + 0.3mm  
 8.Operating Temperature:-20 to +70℃  
 8.使用温度: -20 to +70℃

Height	
15	1.5MM
20	2.0MM
25	2.5MM

TP6122212 Height



5	Terminal 端子	Brass	3	Ag plating 镀银
4	Reed 簧片	Phosphor bronze 磷青铜	1	silvery white 银白色
3	Hull 外壳	Brass	1	silvery white 银白色
2	Pedestal 基座	LCP	1	Black 黑色
1	Hand shank 手柄	PA46	4	Ag plating 镀银
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME: TP6122212
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: <a href="https://www.rocpcu.tw">www.rocpcu.tw</a>
<b>ROCPCU TECHNOLOGY CO.,LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				