




Circuit



PCB Layout

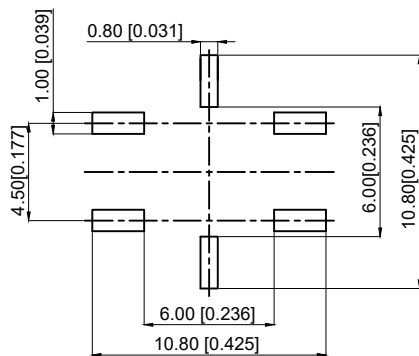

NOTES:

备注:

- 1.RATING:12VDC 50mA
- 2.额定值: 12VDC 50mA
3. CONTACT RESISTANCE:100mΩ Max
- 4.接触电阻: 最大100mΩ
5. INSULATION RESISTANCE:250VDC FOR 1 MIN
- 6.绝缘电阻: 250VDC持续1分钟
7. DIELECTRIC STRENGTH:250VAC(50/60Hz) FOR 1 MIN
- 8.介电强度: 250VAC (50/60Hz) 持续1分钟

5.LIFE TEST:100,000 CYCLES

- 5.寿命试验: 100000次循环
6. OPERATION FORCE:260gf±80gf
- 6.操作力: 260gf±80gf
7. STROKE:0.25±0.1mm
- 7.行程: 0.25±0.1mm
8. TEMPERATURE RANGE:-20℃~+70℃
- 8.温度范围: -20℃~+70℃

TPC01-200ML



LED COLOR

LED COLOR	
0	Other
1	Red
2	Yellow
3	Green
4	Blue
5	White

6	LED	1	Green 绿色
5	COVER 上盖	1	PET
4	BUTTON 按钮	1	PA66
3	SPRING PLATE 簧片	1	SUS 不锈钢
2	CASE 塑坐	1	PA66
1	TERMINAL 端子	6	Brass/Silver Plated 黄铜/镀银
NO	PART NAME 部件	Quantity 数量	MATERIAL 材质

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME: TPC01-200ML
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
<b>ROCPCU TECHNOLOGY CO.,LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				