



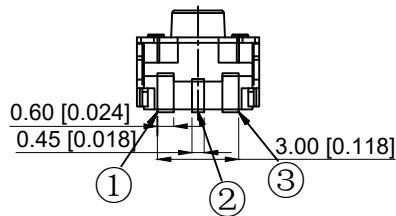


NOTES:  
 1. Rate voltage: 50mA DC12V  
 1. 额定电压: 50mA DC12V  
 2. Contact resistance: ≤100mΩ  
 2. 接触电阻: ≤100mΩ  
 3. Travel: 0.25±0.15mm  
 3. 行程: 0.25±0.15mm

4. Insulated resistance: ≥100mΩ  
 4. 绝缘电阻: ≥100mΩ  
 5. Dielectric strength: ≥250VAC  
 5. 介电强度: ≥250VAC  
 6. life: 20000 time  
 6. 寿命: 20000 次  
 7. working temperature: -20℃~80℃  
 7. 工作温度: -20℃~80℃

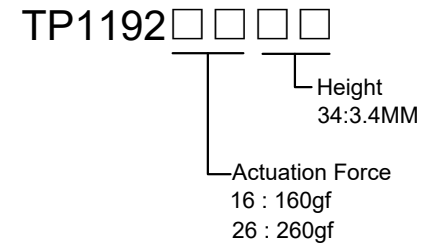

6	Button 按钮	Silica gel	1	Blue 蓝色
5	Blind flange 盖板	Phosphorous copper	1	Ag plating 镀银
4	Dustproof film 防尘膜	Amanium	1	Orange 橙色
3	Shrapnel 弹片	SUS	2	Ag plating 镀银
2	Noumenon 本体	LCP	1	BLACK 黑色
1	Card 卡件	Phosphorous copper	1	Ag plating 镀银
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME: TP1192□□□□
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
<b>ROCPCU TECHNOLOGY CO., LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				