

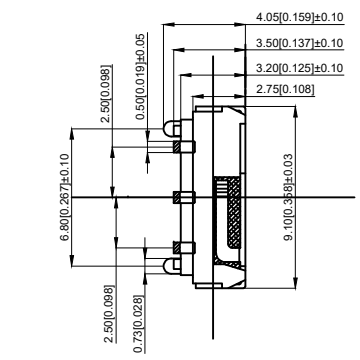


- NOTES:
1. Rating: 50mA 12V DC
1. 额定值: 50mA 12V DC
 2. Contact Resistance: ≤100mΩ Max
2. 接触电阻: ≤100mΩ
 3. Operating Force: 200±100gf
3. 操作力: 200±100gf
 4. Insulation Resistance: ≥100MΩ
4. 绝缘电阻: ≥100MΩ
 5. Dielectric strength: AC100V 50Hz 1Min
5. 抗电强度: AC100V 50Hz 1Min
 6. Life: 10,000 times
6. 寿命: 10,000 次
 7. Operating Temperature: -10°C ~+60°C
7. 使用温度: -10°C ~+60°C



4	lid 盖子	SUS	1	silvery white 银白色
3	Contact spring 接触簧片	Silver phosphorus bronze 银磷青铜	1	silvery white 银白色
2	Key 按键	Nylon 尼龙	1	Black 黑色
1	Base 底座	PPA	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE

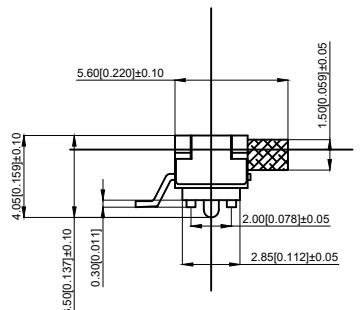

COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP614221240
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw

ROCPCU TECHNOLOGY CO., LTD

Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission