

NOTES:





1. Rating: 12VDC 50mA  
1. 额定值: 12VDC 50mA
2. Dielectric Strength: 100V AC  
2. 耐电压: 100V AC
3. Contact Resistance: ≤100mΩ Max  
3. 接触电阻: ≤100mΩ
4. Insulation Resistance: ≥100MΩ  
4. 绝缘电阻: ≥100MΩ

5. Operating Force: 200±100gf  
5. 操作力: 200±100gf
6. Life: 10,000 times  
6. 寿命: 10,000 times
7. operate temperature: -10℃~60℃  
7. 操作温度: -10℃~60℃
8. Material Properties: SGS  
8. 材料属性: 环保

Height	
20	2.0MM
25	2.5MM
30	3.0MM
40	4.0MM

TP6091203 □

Height

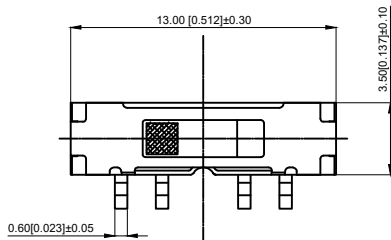

NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注
4	Cover 盖子	SUS	1	Silvery white 银白色
3	Contact spring 接触簧片	Bronze	2	Silvery white 银白色
2	Key 按键	Nylon	1	Black 黑色
1	Base 底座	PPA-Brass	1	Ag plating-Black 镀银-黑色

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME: TP6091203 □
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
<b>ROCPCU TECHNOLOGY CO.,LTD</b>				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				