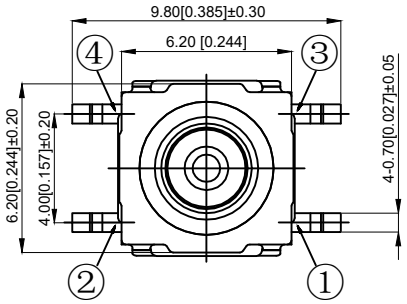

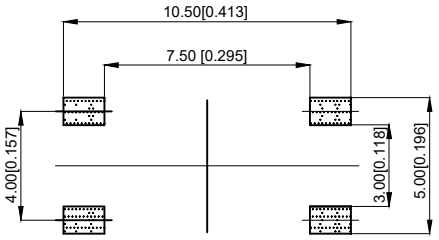

P.C.BLAND DIMENSION

NOTES:
1.Rating:12VDC 50mA
1.额定值：12VDC 50mA
2.Dielectric Strength:250V AC
2.耐电压：250V AC
3.Contact Resistance:≤100mΩ Max
3.接触电阻：≤100mΩ
4.Insulation Resistance:≥100MΩ
4.绝缘电阻：≥100MΩ
5.Working temperature: -40 ℃~+80 ℃
5.工作温度：-40℃~+80℃
6.Stroke: 0.40 ± 0.20mm
6.行程：0.40±0.20mm
7.Waterproof grade: IP67
7.防水等级：IP67
8.Life：300,000 times
8.寿命：300,000 次

TP1412□□□□
- Height
  72:7.2MM
- Actuation Force
  16 : 160gf
  26 : 260gf





CIRCUIT DIAGRAM





NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注
6	Button 按钮	LCP	1	Black 黑色
5	Cover 盖板	SUS	1	
4	Plunget 垫片	RUBBER	1	Sky Blue 天蓝色
3	Shrapnel 弹片	SUS	1	Ag plating 镀银
2	Pedestal 基座	PA6T	1	Black 黑色
1	Terminal 端子	H65	1	Ag plating 镀银

REV	DATE	REVISION DESCRIPTION	ISSUE
A4			
A3			
A2			
A1			

台普 ROCPU

COMMON TOLERANCE	
X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	———

UNIT	MM	PROJCTED	
DRAWN BY	SHUHAO	CHECKED BY	COCO
DATE	2019	APPROVAL B	ALEN

PRODUCT NAME:TP1412□□□□

MODEL NO:

Https: www.rocpu.tw

ROCPU TECHNOLONGY CO.,LTD

Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission