

Welding diagram
焊接图

SPECIFICATION

规范
 Rating: 50mA, 12V DC
 额定值: 50mA, 12V DC
 Insulation resistance: ≥100MΩ
 绝缘电阻: ≥100MΩ
 Dielectric strength: 250V 50HZ 1 min
 抗电强度: 250V 50HZ 1 min

Contact resistance: ≤100mΩ max
 接触电阻: ≤100mΩ max
 Travel: 0.25±0.1mm
 行程: 0.25±0.1mm
 Lifetime: 100000 times
 寿命: 100000 times

Height	
43	4.3MM
50	5.0MM



TP1672 □ □ □ □

Height



Actuation Force

16 : 160gf

26 : 260gf

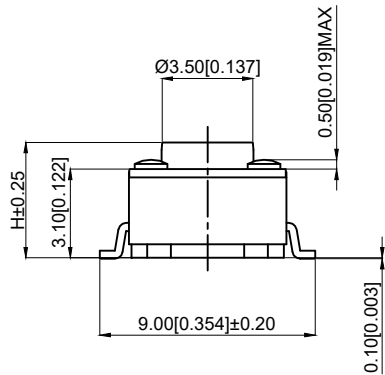

Circuit diagram
电路图

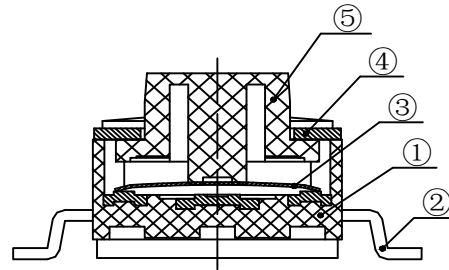

5	Stem 按钮	PA6T	1	Black 黑色
4	Cover plate 盖板	SUS	1	
3	Shrapnel 弹片	SUS	1	
2	Pin 引脚	Brass	1	Agplating
1	Base 基座	PA6T	1	Black 黑色
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25

ANGULAR

UNIT	MM	PROJECTED		PRODUCT NAME: TP1672 □ □ □ □
DRAWN BY	SHUHAO	CHECKED BY	COCO	MODEL NO:
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
ROCPCU TECHNOLOGY CO., LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				